

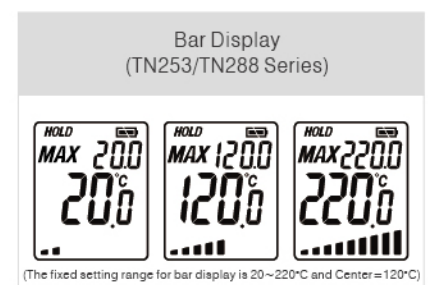


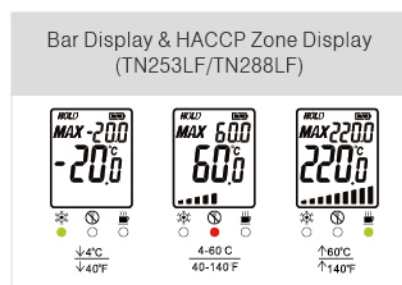

• AUTO • HACCP • HVAC • Industry • Power • Laboratory

Compact INFRARED THERMOMETER

- Bright built-in Laser provides easy aiming
- Two separate batteries for Measurement and Laser
- LCD Bar Display (TN253/TN288 Series)
- HACCP Zone display (TN253LF/TN288LF)
- IP54 Splash Proof (TN288 Series)
- Adjustable Emissivity



	TN205	TN205L	TN253L	TN253LF(FOR HACCP)	TN288L	TN288LF(FOR HACCP)
Description	IRT+Laser (Model "L" with Laser)					
IP Classification	-			IP54		
Measurement Range	-55~250°C(-67~482°F)			-55~350°C(-67~662°F)		
Full Range Accuracy (Tamb=23±3°C)	±2% of reading or 2°C(4°F) which is greater				≥0°C: ±2% of reading or 2°C(4°F) whichever is greater <0°C: ±(2°C+0.05/°C)°C	
Distance:Spot	6:1					
Emissivity Range	0.95 default, adjustable from 0.05 to 1					
Resolution	0.1°C/0.1°F at -9.9~199.9(°C/°F), otherwise 1°C/1°F			0.1°C/0.1°F at -55~199.9(°C/°F), otherwise 1°C/1°F		
Mode	Max,Min,Lock,Laser(optional)			Real Time Max,Bar Display		
Power Supply	CR2032 x 1 (L-CR2032 x 2)			AAA x 2		

Specifications are subject to change without notice